


MJ May Series 38XX Super-Adhesive Nylon Hook and Loop

Made exclusively from Velcro® Texacro® Brand Nylon Fasteners

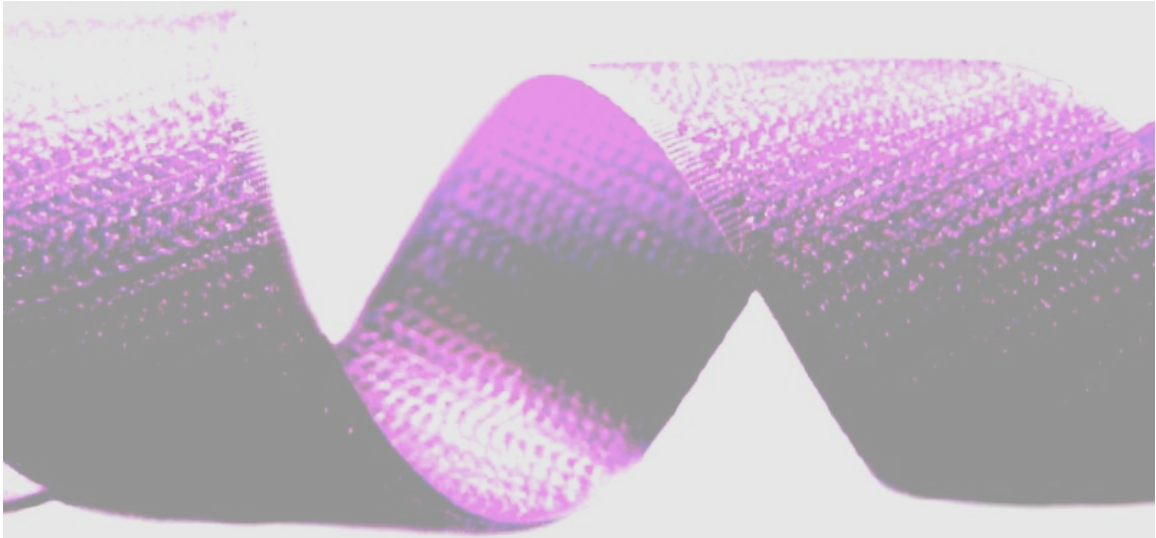

 **MJ MAY**
Material Specialists Inc.

MJ May maintains huge inventories of various hook and loop materials on spools as large as 700 yards each and we have the capability to cut and package to any requirement our customers may have. Whether you need the hook mated to the loop or packaged separately, we have the flexibility to get you exactly what you need. We can package your product in standard industrial packaging, small commercial spools, or in retail-ready blister packs. Whatever your project requires, MJ May has the know how to help you accomplish your goals.

MJ May Series 38XX Super-Adhesive Nylon Hook and Loop

Our Series 38XX Super-Adhesive Nylon Hook and Loop is made exclusively from Velcro® Texacro® brand nylon fasteners. A popular choice for customers looking for a more aggressive adhesive backing than offered on our Series 10XX Hook and Loop, but without the expense of our superior 16XX series rubber based adhesive backing. Available from stock with Velcro® 0132 rubber based pressure sensitive adhesive, we maintain inventories of 1" and 2" versions of this material. Colors available include black and white. The Nylon construction of our Series 38XX give it both moisture and chemical resistance, making it an excellent all purpose woven fastener. The rubber based adhesive works well on most materials, especially polypropylene and polyethylene, as well as, most plastics, metals, and painted surfaces.

Series 38XX Performance

Material Type	Description	Thickness	Temperature Range	Cycle Life	Typical Peel**	Shear Strength	Length-Wise Tension Strength
Adhesive Back	Hook	.125"	-70 to +200 F				
	Loop	.125"	-70 to +200 F				
	Hook & Loop Mated	.188"	-70 to +200 F	5,000 (medium)	1.3 PIW	13.0 PSI	6.0 PSI
** - PIW is pounds per inch width (force required to peel hook and loop apart on a 1" wide strip).							

Velcro® brand Adhesive 0132

Rubber based pressure sensitive adhesive suitable for most substrates.

- Formulated for many substrates
- High tack – quick setting
- Achieves 80% bond strength in an hour; full strength in 30 hours
- Temperature operating range -40 to +120 F
- Recommended for most room temperature applications

Series 38XX Alternatives

In addition to the products listed above, MJ May stocks our 16XX Series of Ultra-Adhesive backed hook and loop, which utilizes the Velcro® brand 0115 rubber based adhesive, which bonds to your toughest materials. With similar temperature operating ranges and application uses to our 38XX Series product, our 16XX series product also has a higher cycle life and works extremely well on uneven or rough surfaces. This product is available in ½", 5/8", ¾", 1", 2", and 4" widths in black and white and is available for immediate shipment.